

[illegible]

The diagram shows a central grid structure (16) with scanning electrodes (5) and sustain electrodes (6). The scanning electrode driver (18) is connected to the scanning electrodes (5), and the sustain electrode driver (19) is connected to the sustain electrodes (6). The address electrode driver (17) is connected to the grid structure (16). The grid structure (16) is also connected to the scanning electrode driver (18) and the sustain electrode driver (19).

FIG. 3

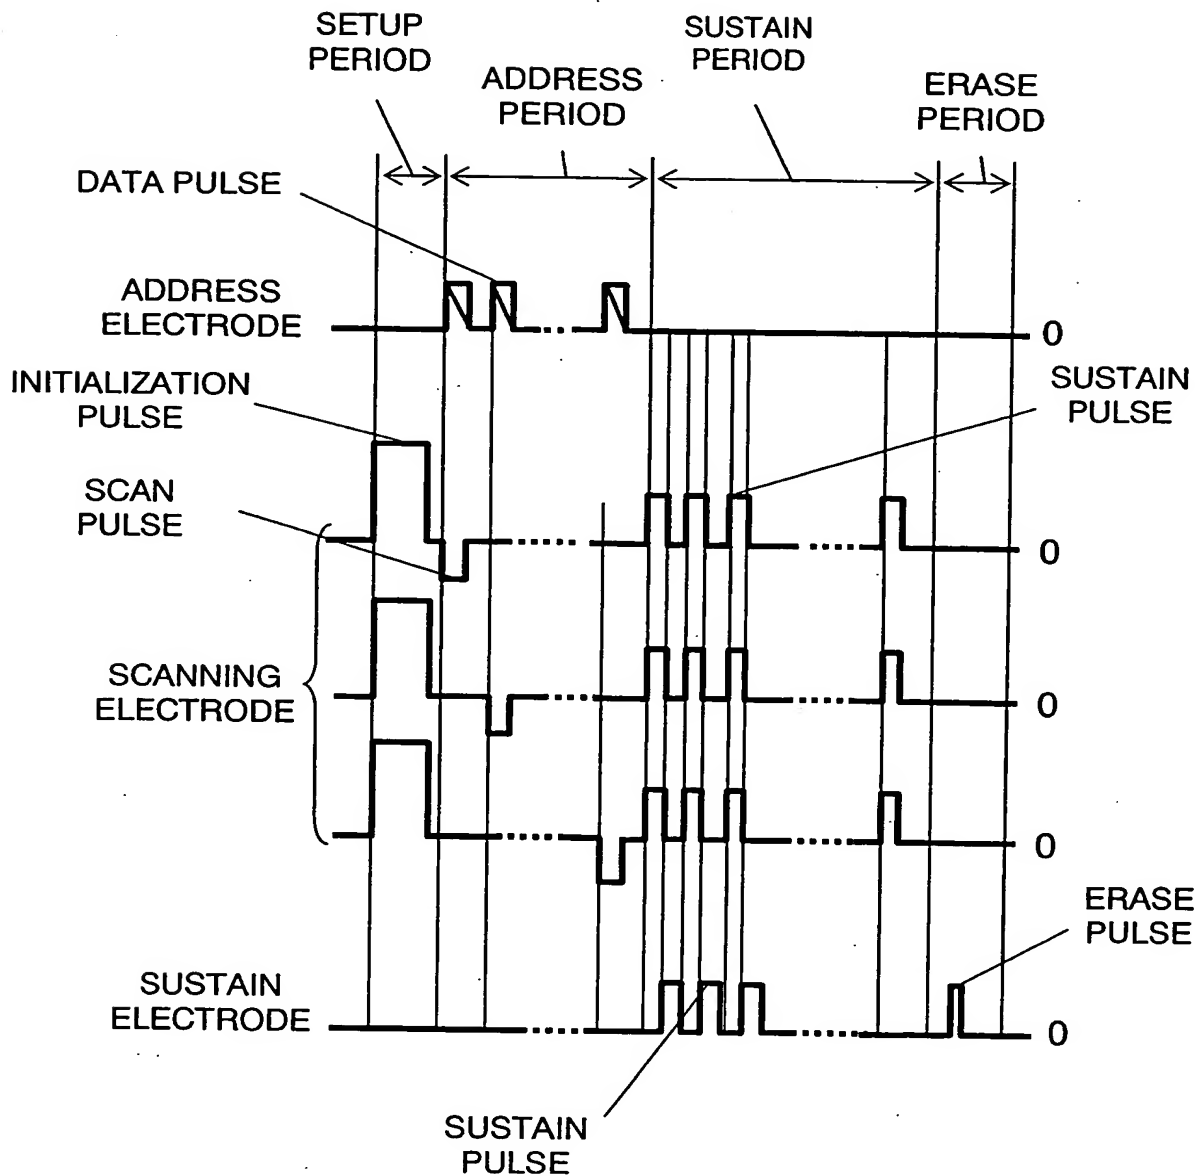


FIG. 4

